



**Degraded joints?**  
**We have the definitive solution**  
**in just**



**12 h**

# Smart Joint® Precasted joint

**Smart Joint®** is a precasted joint of composite material used in correspondence with old degraded joints. Suitable for a high intensity of heavy traffic flooring, industrial kind.

It is applied in total adherence to the existing support, becoming itself a floor part.


## Advantages

- It guarantees floor flatness and continuity.
- It prevents wheels wear of used means for handling.
- It eliminates shocks, so it preserves the health of forklift drivers.
- Easy to apply, after only 12 hours, the surface can be used.
- It allows both flooring vertical and horizontal movements.
- Chemically resistant.
- It does not deteriorate over time and requires no maintenance.

## Technical features

Module length: 1.000 mm.  
Module width: 250 mm.  
Module height: 25 mm.  
Maximum gap existing joint: 29 mm.  
Maximum horizontal movement: 15 mm.  
Compression strength: 90 N/mm<sup>2</sup>.  
Flexural resistance: 75 N/mm<sup>2</sup>.  
Color: gray concrete.

**Smart Joint®** is Edil Noli srl exclusive patent no. 102015000042401 issued on 23.01.2018

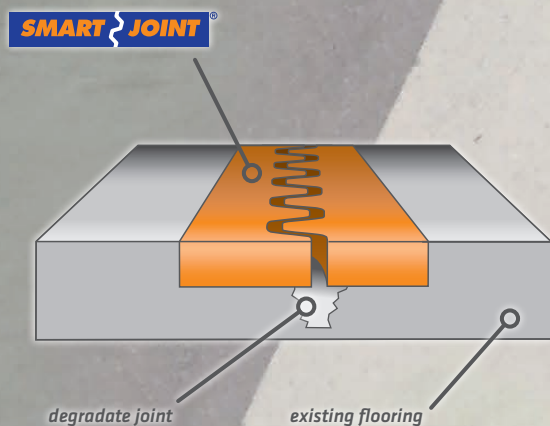

**H 18:00**  
**Work Starting**

**12 h**



**They chose us:**



**H 6:00**  
**Restarting of forklifts traffic**